




BV

Ref.	description
IGBVS1	max. 3 x 2.5 mm ² conductors

Watertight connectors pre-filled with insulating gel suitable for low voltage connection of solenoid valves to the electric cable. Quick to install, with no tools necessary, simply insert the cables without stripping them and then press the two tabs for a watertight connection between the electric cables. They also offer optimum insulation in flooded wells.

Technical characteristics

- Ready for use, pre-filled with insulating gel
- Electric cable max 3x2.5 mm².
- Maximum use voltage 30 volt
- Working temperature from -30°C to +70°C
- Also for connections in wells

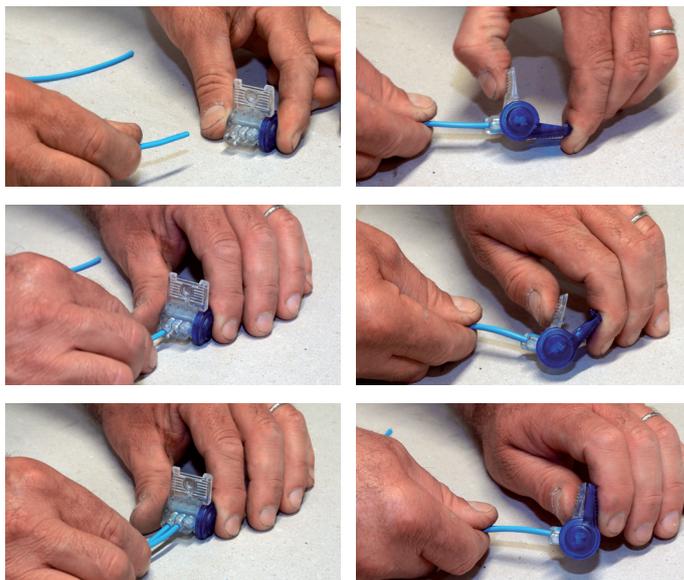

Each solenoid valve needs 2 connectors